iCHAIR MC S

1.616

Allowed user weight

75 kg (incl. additional load)



MEYRA GROUP



Central legrest, 90° knee angle



200 mm seat lift, tilt



Long-life LED lighting



Side panel transparent

The big small one

EFFICIENCY

- Effectiveness through simple maintenance and a high level of service friendliness
- Little need for repairs by implementing high value and durable parts
- Modular structure of the iChair-family enables compatibility of parts and parts groups
- Numerous adjustment options allow individual adaptation

THERAPEUTIC BENEFIT

- Effective pressure relief and relaxing positioning for long term sitting, through large electric adjustment sectors
- The central leg support makes a 90° knee angle possible
- Adjustable back and preparation for external seating systems according to individual needs
- Effective pressure relief due to electric seat angle adjustment by 22° and by 30° in conjunction with seat elevation

FIELD OF USE

- The proven mc2 for indoor and outdoor use with junior seat and junior options
- Outdoors: Good rear suspension
- Indoors: compact chassis with integrated anti-tip castors easy handling in tight spots
- Seat elevation 200 mm optional

● ORDER ○ COST ESTIMATE ○ CUSTOM DESIGN

Please send the order form by e-mail to: info@meyragroup.com **Customer service:** +49 571 93292 555

Billing address / Customer ref. no.:

Delivery address:

Tax-ID

Consignment / Comments:

Order quantity:



Allowed user weight
75 kg (incl. additional load)

Hints
Our Terms and Conditions as stated at www.meyra.de/AGB shall apply
You can find information on the measurement process at www.meyra.de/messverfahren

Valid from 01.01.2026 – 31.12.2026.
Errors, misprints and changes reserved.

Use our K.I.S.S.S. for orders and configurations at www.kisss-by-meyra.de
You avoid queries and incorrect orders thanks to the buildability check

EPOWER

USER DATA

First name

Name

Street

ZIP CODE

City

Country

Birthday

Diagnosis 1

Diagnosis 2

Tel.

Mobil

E-mail

Order number

Health insurance fund / cost unit

Specialist trade Contact person/phone.

Supply specialist MEYRA

Approval info from week

ANATOMICAL DATA (IN MM)

1) Seat depth

2) Seat width

3) Chest width

4) Chest depth

5) Elbow height

6) Armpit height

7) Back height


8) Head height

9) Forearm length

10) LLL

Body height

Weight (kg)

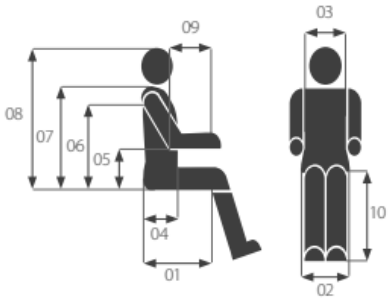

Remarks

❑ I accept the Terms and Conditions of Meyra Distribution GmbH (valid as of January 2023)
https://www.meyra.com/gtc/

Date

City

Signature

EPOWER

Technical specifications

1) measured with 4° seat tilt (without seat cushion)
2) with adjustable back
3) without legrests and without armrests

Seat widths in mm	300 - 440
Seat depth in mm	300 - 400
Back support height in mm	390 / 440 [2]
Lower shank length in mm	250 - 350 [1]
Arm support height in mm	180 - 250 [1]
Front seat height in mm	420 - 470 [1]
Length with footrest in mm	970
Length without footrests in mm	790
Width ready to drive in mm from	590
Height without head support in mm	890 - 925 [2]
Transport length in mm	790
Transport height in mm	610
Front wheel size in mm	190 x 50 (8") / 225 x 70 (9")
Rear wheel size in mm	320 x 60 (12.5")
Max. obstacle height in mm	60
Turning radius in mm	840
Transport empty weight basic configuration min.	89 kg [3]
User weight	75 kg
Permitted overall weight incl. options	200 kg
Max. additional loading	10 kg
Driving speed	6 / 10 km/h
Motor power	2 x 180 W / 2 x 300 W
Permitted inclination/slopes	8,5° (15%)
Form of steering	indirect
Seat camber electric	0° to 22°
Seat tilt electric i.c. with Seat lift	0° to 30°
Seat camber mechanical	0° to 10°
Electrically adjustable backrest angle	80° - 140° (Code 25)
Mechanical backrest angle	80° - 120° (Code 401)
Seat lift electric	200 mm
Range	38 Ah (5h), 45 Ah (20h) max. 28 km / 63 Ah (5h), 73 Ah (20h) max. 40 km

Technical data *** continued

Drive	Rear

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
(S) Special construction/individual solution o.r. - on request

00 Chassis/Motorisation

	CODE	SPEED	RANGE	MOTOR POWER
❑	115	6 km/h	max. 40 km	2 x 180 W
❑	117	10 km/h	max. 35 km	2 x 300 W

Chassis options

	CODE	DESCRIPTION
❑	875	Suspension for user weight up to 75 kg

01 Seat width (SW)

	CODE	DESCRIPTION	SEAT SURFACE WIDTH
❑	30	SW continuously adjustable from 300 to 360 mm through the arm supports	300 mm
❑	34	SW continuously adjustable from 340 to 400 mm through the arm supports	340 mm
❑	38	SW continuously adjustable from 380 to 440 mm through the arm supports	380 mm

02 Front seat height (FSH) in combination with steering wheel (without seat cushion)

FSH (mm)	420	435	440	450	455	470
A	❑		❑		❑	
B		❑		❑		❑

			Tyres	
Code	Ø	rim	Puncture-resistant pneumatic tyres CODE 146	Puncture-proof	Standard pneumatic tyres CODE 481
157	8"	Aluminium rim		❑ A	❑ A
163	9"	Aluminium rim	❑ B	❑ B	

⚠ *FSH 440+ / 450+ only in conjunction with Seat lift 200 mm lifting CODE 27*

Steering wheel options

	CODE	DESCRIPTION
❑	816	Mud guard for Castor wheels ⚠ *Only i.c. with steering wheels 9" CODE 163*

EPOWER

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

03 Drive wheels

			Puncture- resistant pneumatic tyres CODE 846		Puncture proof tyre CODE 904	
Code	Ø	rim	grey	black	grey	black
815	12"	Aluminium rim	❑	❑	❑	❑

Rear wheel options

	CODE	DESCRIPTION
❑	824	Mudguard for drive wheels, Curved

04 Seat Tilt

	CODE	DESCRIPTION	SEAT ANGLING/LIFT
❑	119	Mechanic seat tilt, in steps	0° to +10°
❑	118	Electric seat tilting, continuous	0° to +22°
❑	27	Electric seatlift 200 mm lift incl. seat tilt ⚠ *Only in conjunction with R-Net CODE 702 Only in conjunction with luggage rack CODE 994*	0° to +30°

05 Seat-/back systems

		Seat pan with cushion 30 mm CODE 560			
CODE	Back / BH	SD 300 mm-Code 390	SD 330 mm-Code 393	SD 370 mm-Code 367	SD 400 mm-Code 615
444/736	Fitting belt black 440mm	❑	❑	❑	❑
439/736	Fitting belt black 390 mm	❑	❑	❑	❑

06 Back support options

	CODE	DESIGNATION
❑	2032	Thorax cushions, pair, small

EPOWER

☐ Please select by ticking the relevant boxes
S Special construction/individual solution o.r. - on request
Standard version: If no other selection is made, the standard version will be delivered.

Back support options (Adjustments)

	CODE	DESCRIPTION
❑	814	Continuous push bar
❑	410	Single push handles incl. stabiliser rod ⚠ *Not compatible with headrest CODE 913*
❑	913	Head support, synthetic leather black ⚠ *Only in conjunction with a continuous push-pull handle CODE 814*
❑	401	Mechanical backrest recline
❑	25	Powered backrest recline ⚠ *It is recommended to use the headrest, imitation leather black (CODE 913).*

07 Arm Supports and Arm Pads

	CODE	DESCRIPTION
❑	106	Standard side panel with padded armrest and matt-transparent fabric cover

08 Leg supports

	CODE	DESCRIPTION
❑	93	80° Legrests, detachable and swing-away
❑	5100	Central leg support with continuous footplate

09 Footrests

	CODE	DESCRIPTION	depth	LLL
❑	54	One Piece footrest, 60 mm depth adjustable (in 4 steps), flip-up, height and angle adjustable ⚠ *Only i.c.w. legrest Code 93*	150 mm	280-430mm
❑	808	Footrests divided, height adjustable, up-folding and angle adjustable ⚠ *Only i.c.w. legrest Code 93*	150 mm	280-430mm
❑	822	Toe strap (pair)		
❑	823	Heel Loops (pair)		

☐ Please select by ticking the relevant boxes
S Special construction/individual solution o.r. - on request
Standard version: If no other selection is made, the standard version will be delivered.

10 Batteries and Chargers

	CODE	DESCRIPTION	RANGE
❑	5159	Maintenance free batteries approx. 43 Ah (5h), 50 Ah (20h)	30 km / 25 km
❑	5158	Maintenance-free batteries approx.66 Ah (5h), 80 Ah (20h)	40 km / 35 km
❑	732	Charger 8 A for 50 Ah(20h)	
❑	733	Charger 12 A for 73 Ah(20h)	

11 Lighting

	CODE	DESCRIPTION
❑	932	Active LED-lighting front and rear acc. to StVZO

12 Joystick modules and accessories

		CONTROL			
Code	Control modules	none	2 / 682	6 / 678	8 / 780
408	VR2	❑	❑		
702/415	R-NET LED			❑	
702/416	R-NET LCD			❑	
702/398	R-NET LCD IR/BT			❑	
702/839	R-NET OMNI II			❑	

⚠ *Code 839 OMNI II Flashing function and horn function only selectable via menu*

Joystick Location

	CODE	DESCRIPTION
❑	74	Assembly right
❑	60	Assembly left

EPOWER

☐ Please select by ticking the relevant boxes
S Special construction/individual solution o.r. - on request
Standard version: If no other selection is made, the standard version will be delivered.

13 Joystick Mount

	CODE	DESCRIPTION
❑	4859	Joystick bracket, length adjustable
❑	4566	Joystick bracket, length and height adjustable
❑	4860	Joystick bracket, length and height adjustable, swivelling to the side (e.g. on a table)
❑	4874	Protection bar for Joystick VR2 and R-NET
❑	851	Joystick bracket for accompanying person (operating module can be moved from the front to the rear) ⚠ *Only i.c.w. continuous pushing bar CODE 814*

14 Special operating modules

	CODE	DESCRIPTION
❑	4660	Table plate with recess (centred) for operating module, swivelling to the right
❑	4661	Table plate with recess (centred) for operating module, swivelling to the left
❑	4789	Dual Control Joystick with priority switch for accompanying person, incl. assembly on the frame tube

External on/off switch

for users who can hardly operate the keys of the operating module or as an emergency/off function for accompanying person

	CODE	DESCRIPTION
❑	596	External on/off switch, diameter 63 mm, yellow
❑	778	External on/off switch, diameter 30 mm, green
❑	779	External on/off switch, diameter 30 mm, yellow

⚠ *Only i.c.w. joystick module R-NET with LED-Display CODE 702/416 or OMNI II Surround control CODE 839*

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

Joystick attachments

	CODE	DESCRIPTION
❑	553	Tetra-fork vertical
❑	556	Tetra-fork horizontal
❑	734	Tetra-fork horizontal, adjustable to hand width
❑	4589	Mushroom grip
❑	4590	Ball grip
❑	4591	T-grip
❑	4593	Stem grip
❑	4594	Button grip
❑	4595	Softball
❑	4596	Golf ball d=43 mm

Others

	CODE	DESCRIPTION
❑	4612	MicroGuide way joystick ⚠ *only in combination with R-NET OMNI II CODE 702/839* *temporarily not available*
❑	4601	MicroGuide way joystick including bracket and hand pad ⚠ *only in combination with R-NET OMNI II CODE 702/839* *temporarily not available*

15 software

	CODE	DESCRIPTION
❑	985	Series programming (standard)
❑	998	Special programming (deviation from standard)

☐ Please select by ticking the relevant boxes
S Special construction/individual solution o.r. - on request
Standard version: If no other selection is made, the standard version will be delivered.

16 Frame Colours

	CODE	FRAME	AKZENTE
❑	207	Matt black	
❑	212	Matt black	Polar white
❑	186	Matt black	Magic Blue
❑	227	Matt black	Red metallic
❑	180	Matt black	Lemon reflex
❑	214	Matt black	Sun yellow

⚠ *Other colors available on request and at extra charge, see color chart in catalog*

17 Options around the wheelchair

	CODE	DESCRIPTION
❑	906	Rear-view mirror right
❑	927	Rear-view mirror left
❑	589	Shoulder Harness
❑	833	Safety belt (metal buckle)
❑	994	Baggage rack with metal rods
❑	781	USB charging socket
❑	4795	Anti-theft function, key ⚠ *only i.c. with R-Net*
❑	676	Rear marking plate

18 Service

	Item	DESCRIPTION
❑	55704	Flat fee for customised parameterisation (not eligible for discounts) ⚠ *The on-the-spot service covers only simple adjustment of parameter sets, such as acceleration, speed etc.*